S130-20S

Coil 20,5 W

Drawing

Inches
Millimeters

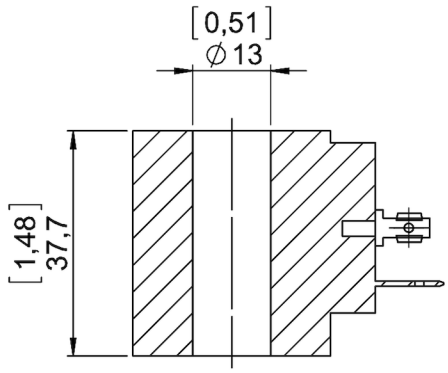



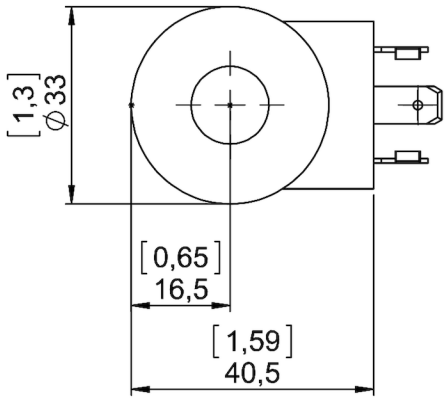

Electric Symbol



TECHNICAL DATA	
ELECTRIC	
Protection class with std. connector DIN:	IP65
Insulation class:	H
Wire insulation class:	H
Nominal voltage:	+/- 10 %
Power at 20 C°:	20,5 W
Max current at 12 Vdc: Max current at 24 Vdc:	1,2 A 0,6 A
ED*:	100% with ambient temperature -20 C° +40 C°

*Note: For temperature or special conditions contact our technical department.

Ordering code	Connector	Circuit	Voltage	Resistance
S130-12DN-20S	DIN 43650	Standard	12 Vdc	7 Ω
S130-24DN-20S	DIN 43650	Standard	24 Vdc	28 Ω
S131-12DU-20S	DEUTSCH	Bidirectional diode	12 Vdc	7 Ω
S131-24DU-20S	DEUTSCH	Bidirectional diode	24 Vdc	28 Ω