LVSLRS 02

Pilot Operated Check Valves, Single Acting, with Manual Lever Control (LH), Line Mounting

Dimensions

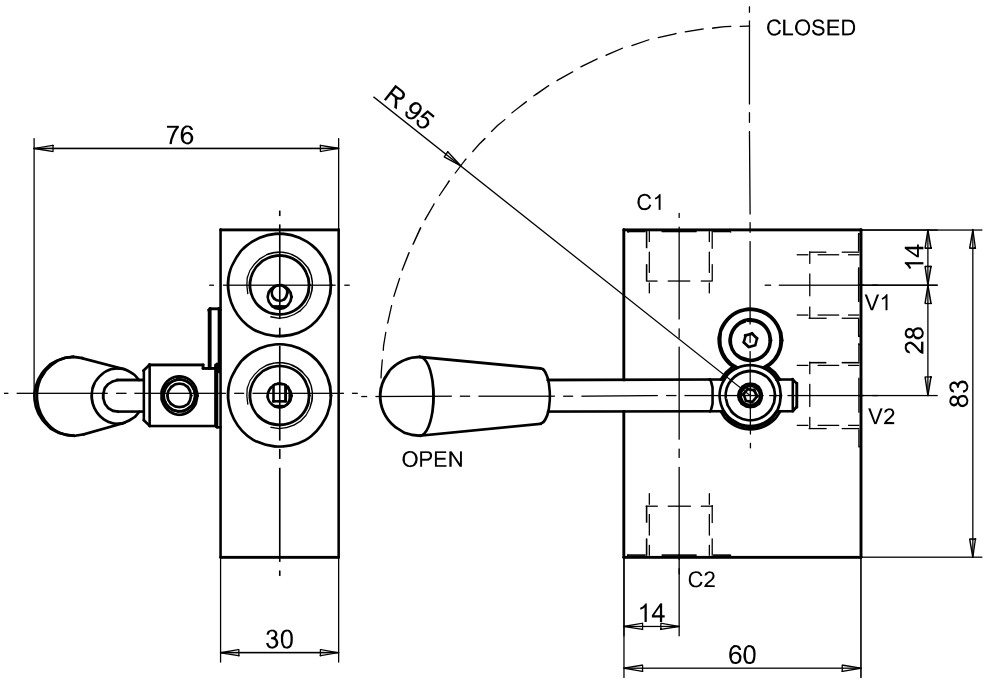

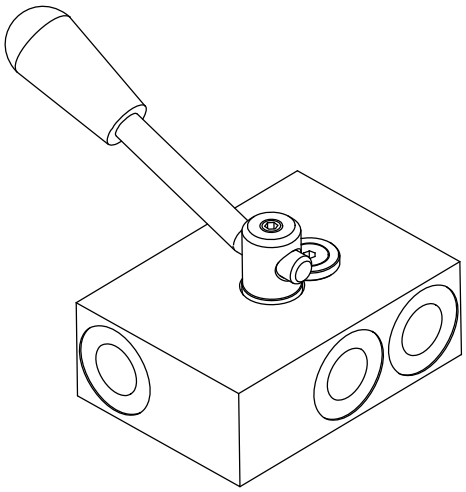

Hydraulic Symbol



Curves

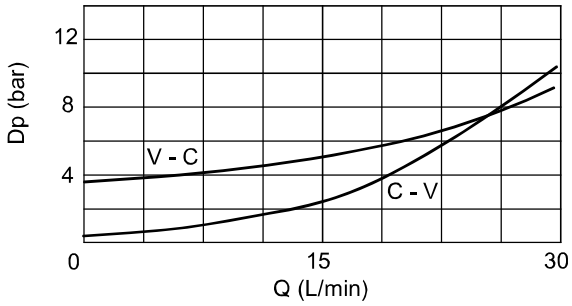

Features

Max Flow	30 lpm
Max Pressure	350 bar
Pilot Ratio	4:1
Cracking Pressure	0,5 bar
Ports	3/8 bsp

Materials: Zinc plated steel cartridge, hardened steel inner parts. Aluminium manifold.

Ordering Code

LVSLRS 02